

Features:

- submersible sewage pump made of cast iron
- motor housing, pump housing and seal carrier made of cast iron
- single-channel impeller made of cast iron with fibre cutting insert
- double bidirectional mechanical seals with intermediate oil chamber
- pressure outlet DN 100
- explosion-proof motor (Ex.)
- lateral cable entry with strain relief and break protection
- protection grade IP 68 – fully submersible

Application:

- pumping of sewage with coarse and long-fibred ingredients
- installation in domestic and public concrete pumping stations
- applicable for vertical and horizontal dry well installations (intermittent duty S3)

Scope of delivery:

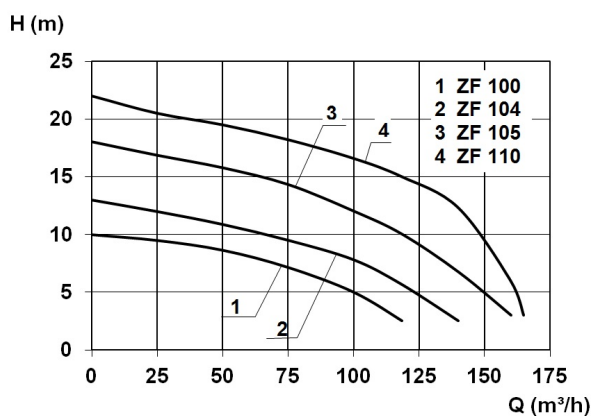
- pump with 10 m power cable
- all pumps without stand feet and outlet bend
- optional coupling system (see accessories)


Product benefits:

- blockage-free operation by fibre-cutting plate and 100 mm solids handling
- high pumping capacity
- explosion-proof version
- double mechanical seal protects motor from incoming water
- guide rail system with coupling foot for existing manholes available

Technical data:

Art.no.	U [V]	P ₁ [W]	P ₂ [W]	I _n [A]	n [min ⁻¹]	Q _{max} [m ³ /h]	H _{max} [m]	SH [mm]	P0	Weight [kg]
11267	400	8.700	7.500	16,6	1450	165,0	22,0	100	DN 100	155

Characteristics:

Materials:

Material impeller:	cast-iron GG25
Seal motor:	mechanical seal SIC/SIC/NBR
Seal pump:	mechanical seal SIC/SIC/NBR
Material motor housing:	cast-iron GG25
Material pump housing:	cast-iron GG25
Material motor shaft:	stainless steel AISI 420

Dimensions:

