

### Features:

- for use behind water softening systems and for calorific value condensate
- high-quality, silicon carbide mechanical seal, stainless steel motor housing (1.4404), stainless steel motor shaft
- additional connection of shower, washbasin and washing machine possible
- integrated audible alarm
- pump fixed on lid -> easy cleaning and maintenance
- potential-free alarm transmission
- 20 litres container volume
- pressure outlet 1 ¼" FPT with integrated non-return valve

### Application:

- drainage of slightly acidic condensate, aggressive or salty media (max. 15% salt content)
- lifting of domestic faecal-free waste water (operation temperature 40°C / short-term up to 90°C)

### Scope of delivery:

- pre-assembled ready for connection with 1,5 m power cable and plug




### Product benefits:

- pumping of slightly acidic condensate, aggressive or salty media (max. 15% salt content)
- particularly suitable for usage in coastal areas
- ready for connection - pump and control unit already integrated
- integrated audible alarm
- double safety due to 2nd float (alarm float)
- all connections prepared; all connection pieces included in delivery

### Technical data:

Art.no.	U [V]	P <sub>1</sub> [W]	P <sub>2</sub> [W]	I <sub>n</sub> [A]	n [min-1]	Q <sub>max</sub> [m <sup>3</sup> /h]	H <sub>max</sub> [m]	SH [mm]	PO	L [mm]	W [mm]	H [mm]	Weight [kg]
11470	230	850	430	3,7	2800	11,5	10,0	10	G 1 1/4	393	244	299	6

### Characteristics:

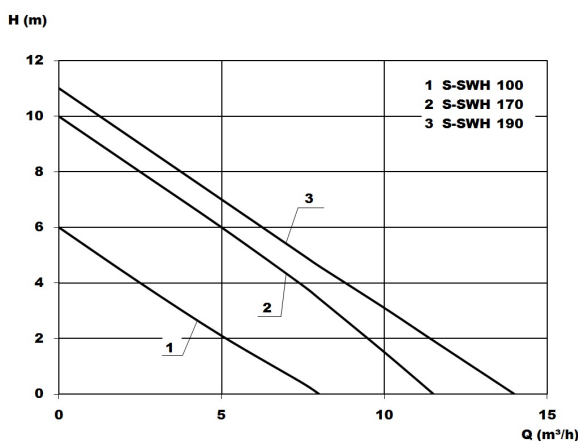

### Materials:

Material impeller:	PA6 GV25
Seal motor:	shaft seal NBR
Seal pump:	mechanical seal carbon/ceramic/Viton
Material motor housing:	stainless steel AISI 316L
Material pump housing:	PP GF20
Material motor shaft:	stainless steel AISI 318LN
Material container:	PP

**Dimensions:**

