

Features:

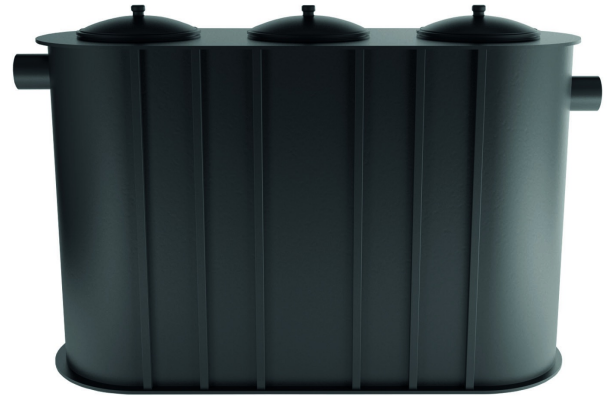
- free standing, polyethylene grease separator in frost-free rooms
- compact oval design
- acc. to DIN EN 1825 without partition between silt trap and separating chamber
- connections for inlet and outlet suitable for PEHD-pipe
- odour-proof inspection cover 1 x up to NS 2, 2 x for NS 4-10
- circular sight glass, sampling device, filling devices and discharge device optionally available

Application:

- sewage treatment in gastronomic businesses and meat-processing industry

Scope of delivery:

- optional accessories


Product benefits:

- Special versions (space saving design, with pump technology available)

Technical data:

Art.no.	L [mm]	W [mm]	H [mm]	Weight [kg]
14328	2625	950	1670	349

Dimensions:

