

### Features:

- submersible waste water pump, made of corrosion- and shock-resistant polypropylene and high-grade stainless steel
- motor winding with thermal winding protection
- mechanical seal and additional shaft seal
- stainless steel motor shaft and motor housing
- jacket cooling
- vertical pressure outlet 1"
- version 'A' with mounted float switch
- version 'KS' with mounted compact float switch (fits into pipes with an inner diameter larger than 250 mm)
- protection grade IP 68 – fully submersible

### Application:

- pumping of clear water and waste water
- portable pump for emergency drainage

### Scope of delivery:

- pump with 10 m power cable and plug




### Product benefits:

- space-saving installation due to overhead pressure outlet
- double sealing by mechanical seal and additional shaft seal

### Technical data:

Art.no.	U [V]	P <sub>1</sub> [W]	P <sub>2</sub> [W]	I <sub>n</sub> [A]	n [min <sup>-1</sup> ]	Q <sub>max</sub> [m <sup>3</sup> /h]	H <sub>max</sub> [m]	SH [mm]	PO	Onmin [mm]	OFFmin [mm]	D [mm]	H [mm]	Weight [kg]
15221	230	600	350	2,9	2800	9,0	11,0	10	G1	40	20	166	292	6,41

### Characteristics:

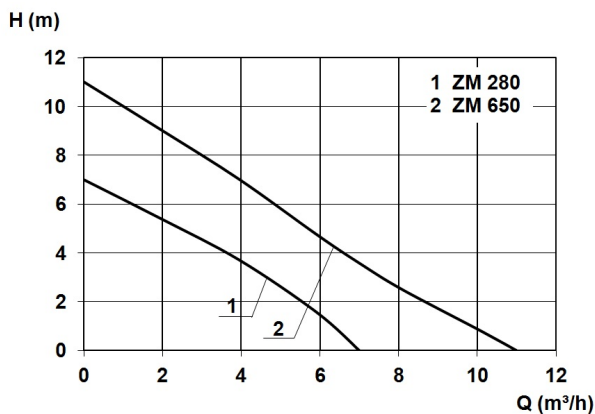

### Materials:

Material impeller:	PA6 GK30
Seal motor:	shaft seal NBR
Seal pump:	mechanical seal carbon/ceramic/NBR
Material motor housing:	stainless steel AISI 304
Material pump housing:	PP GF20
Material motor shaft:	stainless steel AISI 430F

**Dimensions:**

