

Features:

- fully automatic electronic control of the entire installation
- in combination with the pumps CPS 15
- house-internal drinking-water replenishing on demand

Application:

- compact unit for automatic control and water replenishing from rainwater utilization plants
- detached house or two-family house

Scope of delivery:

- level sensor with 25 m cable
- wall-mounting set

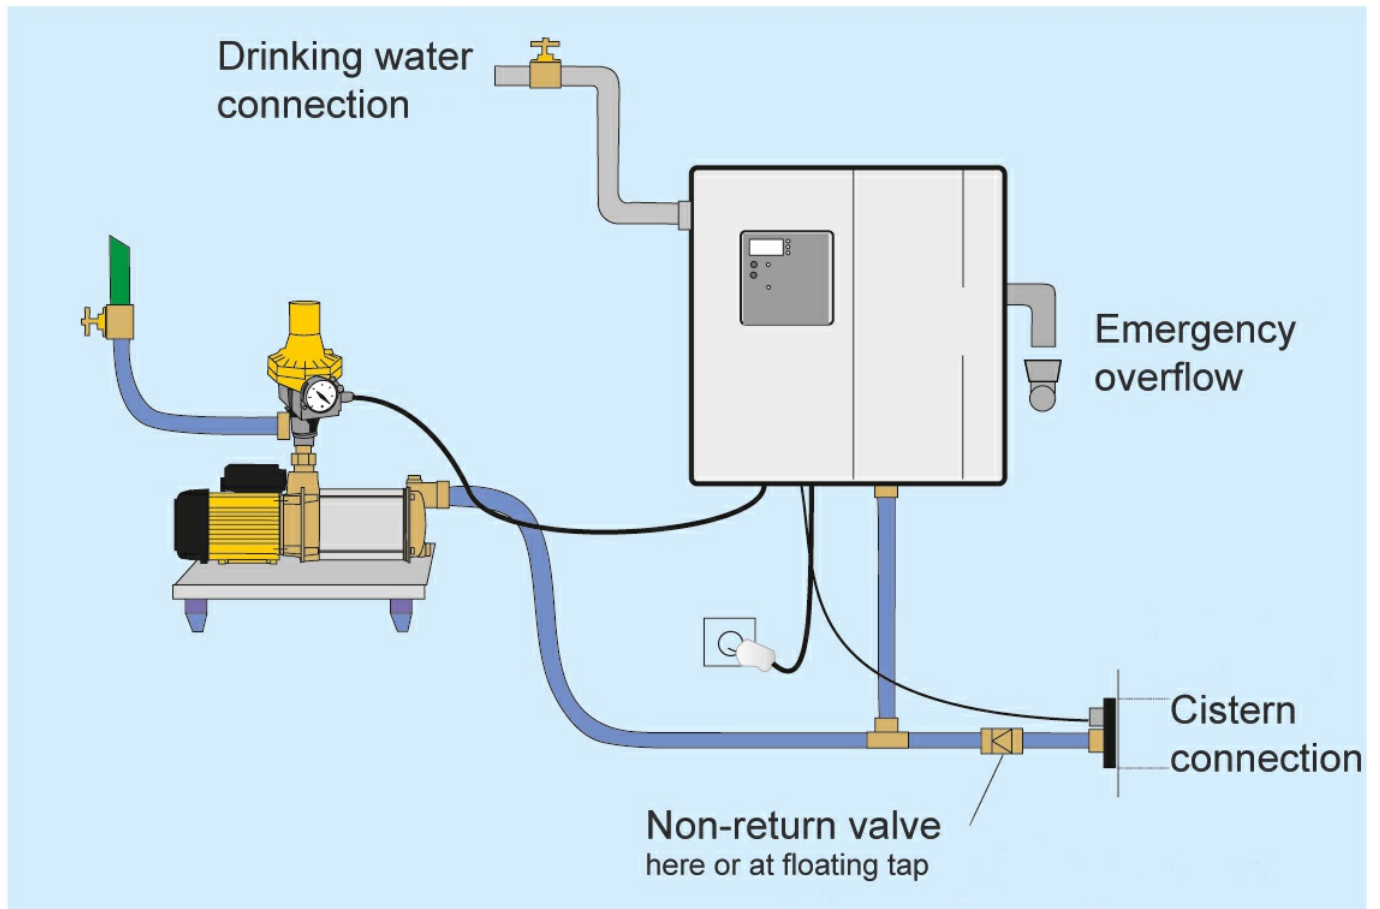

Product benefits:

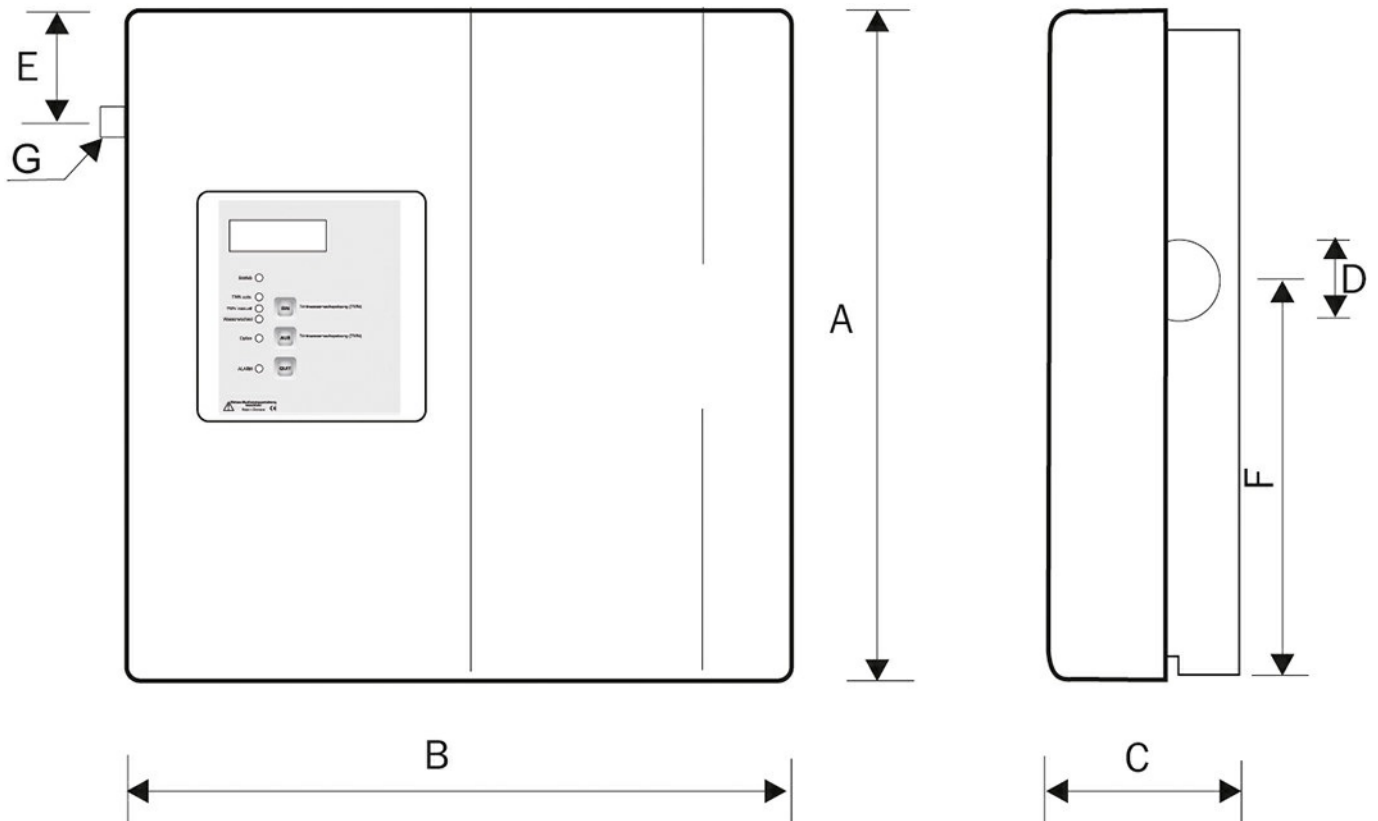
- plug-ready, automatic control and drinking water feeding unit
- combinable with various pump types
- for easy retrofitting for existing horizontal centrifugal pumps
- integrated non-return valve for installation below the backflow level
- version 'Comfort': level indicator via electronic pressure sensor, possibility to connect a feeder pump or backflow monitor

Technical data:

Art.no.	U [V]	In [A]	L [mm]	W [mm]	H [mm]	Weight [kg]
19085	230	16	460	460	210	14

Example of installation:



Dimensions:


A Height [mm]	460
B Width [mm]	460
C Depth [mm]	210
D Emergency overflow	DN 70
E [mm]	120
F [mm]	265
G Drinking water	3/4"
Suction side	1" MT