

**Features:**

- fully automatic electronic control of the entire installation
- in combination with the pumps CPS 15
- house-internal drinking-water replenishing on demand

**Application:**

- compact unit for automatic control and water replenishing from rainwater utilization plants
- detached house or two-family house

**Scope of delivery:**

- level sensor with 25 m cable
- wall-mounting set

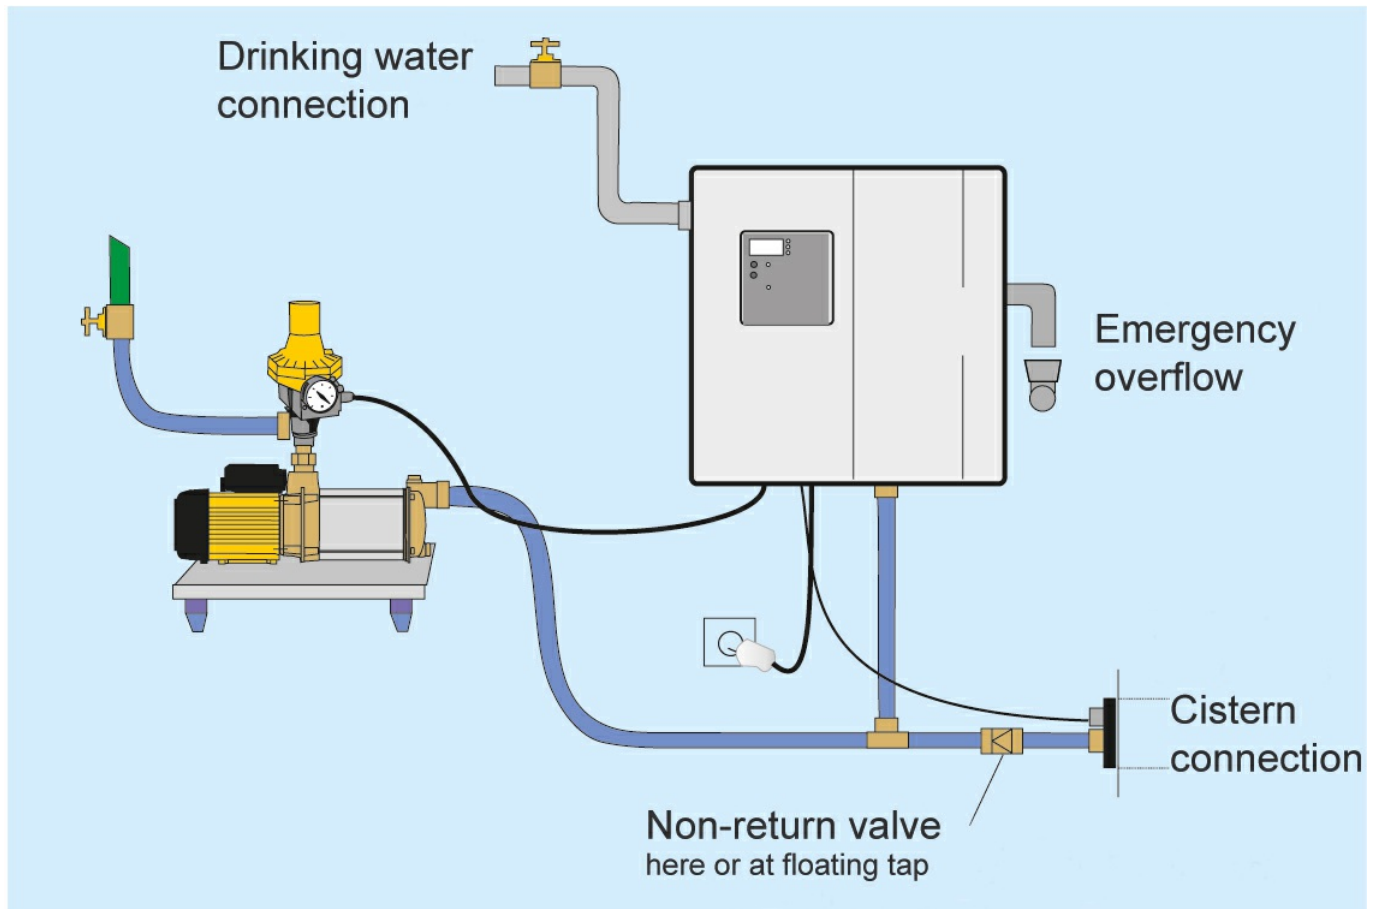

**Product benefits:**

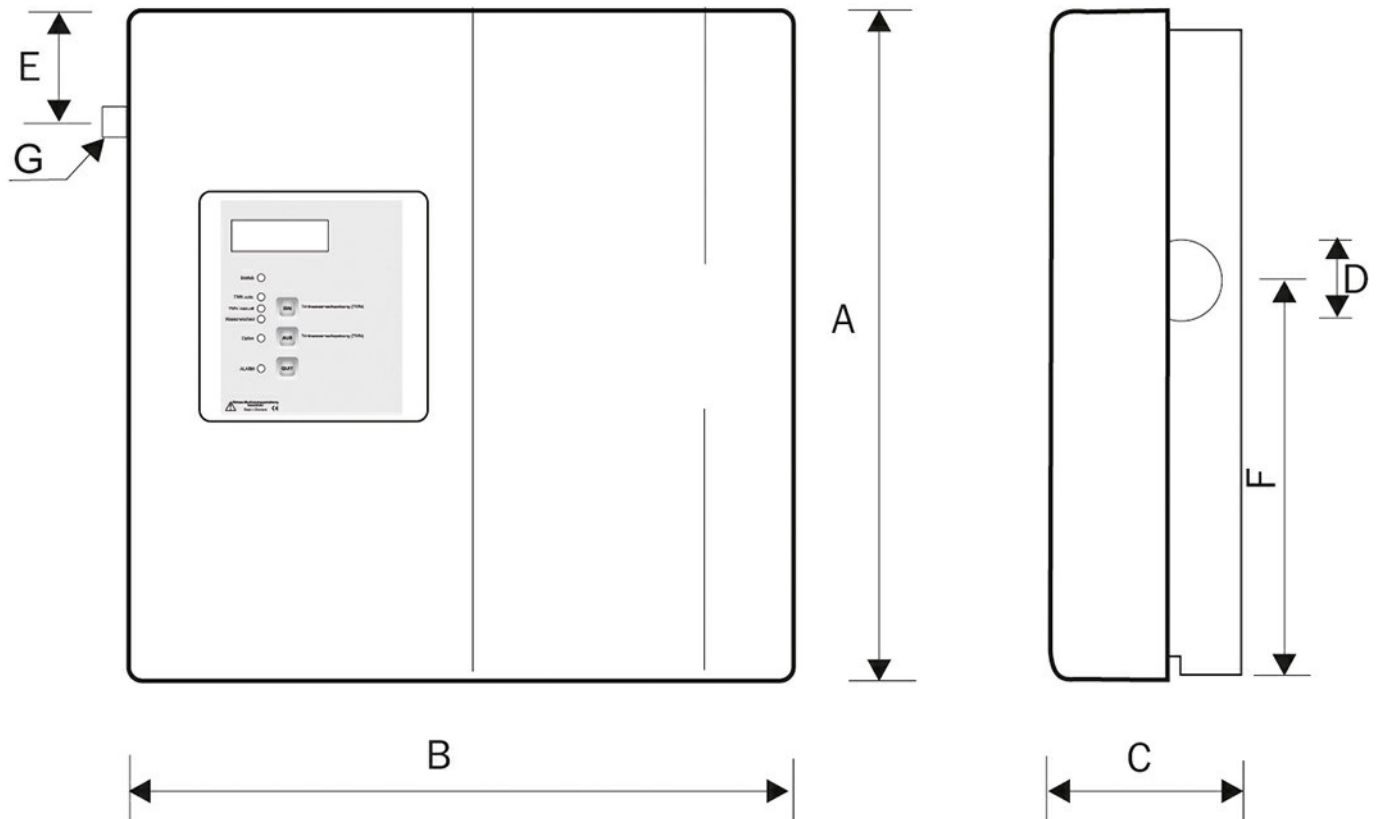
- plug-ready, automatic control and drinking water feeding unit
- combinable with various pump types
- for easy retrofitting for existing horizontal centrifugal pumps
- integrated non-return valve for installation below the backflow level
- version 'Comfort': level indicator via electronic pressure sensor, possibility to connect a feeder pump or backflow monitor

**Technical data:**

Art.no.	U [V]	In [A]	Weight [kg]
19086	230	16	14

**Example of installation:**



**Dimensions:**


A Height [mm]	460
B Width [mm]	460
C Depth [mm]	210
D Emergency overflow	DN 70
E [mm]	120
F [mm]	265
G Drinking water	3/4"
Suction side	1" MT