



Features:

- floating tap FLUX 2.5
- rainwater suction line made of PE, 32mm, 15 m long, for underground laying
- seal RAPID NW 100
- proved threaded elbow joint, vacuum-resistant design with support pipe to prevent assembly errors
- high-quality check valve providing for low friction loss
- 2 Instruction signs "No drinking water"
- 5 Stickers "No drinking water"
- 1 Sign "In this building..."

Application:

- for rainwater utilization plants in detached houses and two-family houses
- flexible and secure connection between outdoor rainwater tank and building services engineering inside the building
- suited for all the filter cisterns up to nominal volume of 10 m³ combined with Tacomat, Rain-center and Rainwater Center
- application in tanks that are fed with filtered rainwater
- suction of the cleanest water appr. 15 cm below water surface

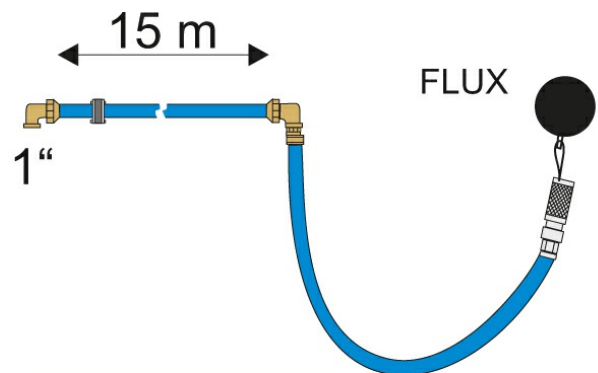

2 x Schild

**Kein
Trinkwasser**

5 x Aufkleber

**Kein
Trinkwasser**
Product benefits:

- easy and safe connection between rainwater storage and home technology
- intake of the cleanest water by floating intake
- protection from water damages due to 'Rapid' sealing insert required
- proven elbow gland, vacuum-resistant version with support tube for prevention of installation faults

Technical data:

Art.no.	Weight [kg]
19118	9,5