

Features:

- Overcomes gravity drainage problems and enables basement showers
- compact size for discreet installation
- Sound pressure level (1m) at 46 dB
- Switch-on height 55 mm
- Installation height shower tray 12 cm
- Operating temperature 35°C
- Prepared shower inlet DN 40, usable on both sides
- Pressure outlet DN 32
- Tank ventilation through activated carbon filter
- Protection grade IP 44

Application:

- Pump suitable for shower and washbasin

Scope of delivery:

- Non-return valve




Product benefits:

- versatile use (shower & washbasin) due to 2 inlets at the bottom side
- low switch-on height

Technical data:

Art.no.	U [V]	P ₁ [W]	I _n [A]	Q _{max} [m ³ /h]	H _{max} [m]	L [mm]	W [mm]	H [mm]	Weight [kg]
21547	230	250	1,3	4,2	4,0	293	177	167	3,7

Characteristics:

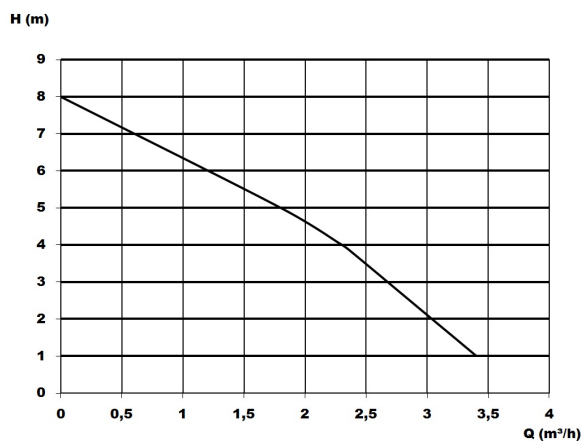

Materials:

Seal motor:	shaft seal
Seal pump:	mechanical seal
Material motor housing:	PA 12 30% GF
Material pump housing:	PA 66 15% GF
Material motor shaft:	stainless steel AISI 303
Material container:	PP

Dimensions:

